



FEATURES:

Stainless Steel Wall Plate

For use with standard 2 1/8" deep single/two gang wall box (not supplied)

UL Type 1 Listed – Provides a basic level of protection against dust, light, and indirect splashing of liquids

1-6 contact blocks (stackable)

Several operators to choose from

Optionally available deep cast aluminum alloy Back Box and gasket, suitable for wet locations (1-3 contact block capacity). Has 3/4" threaded conduit holes (top, back, and bottom), and plugs – 5 holes for 2 gang and 3 holes for single gang)

OPTIONS:



Single Gang Station w optional Back Box and Mushroom Cover (lockable)



Two Gang Station w optional Back Box and Alarm (Audible and Visual)



Two Gang Station w optional back box, Keyed Operators, Full Cover, and Custom Legend


Distributed by:



www.pillaswitch.com

Station Enclosure (shown w optional back box)

Height: 5.75"
 Width: 4.5"
 Depth: 2.75"

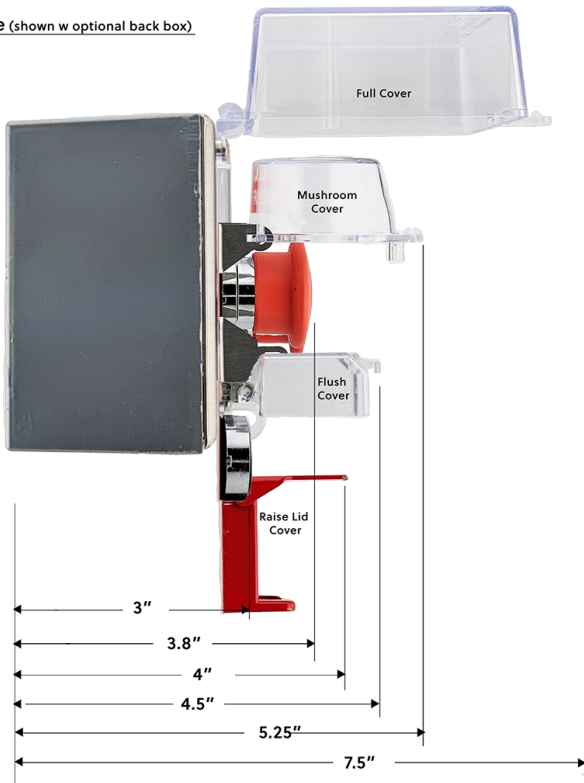

Glow in the Dark Legends:

- EMERGENCY BOILER SHUT-DOWN
- EMERGENCY CHILLER STOP
- EXHAUST FAN
- EMERGENCY FUEL SHUT-OFF
- EMERGENCY GAS SHUT-OFF
- GENERATOR
- EMERGENCY GENERATOR STOP
- EMERGENCY HVAC SHUT-DOWN
- EMERGENCY POWER OFF
- REFRIGERANT PURGE
- EMERGENCY SHUT-DOWN
- EMERGENCY SHUT-OFF
- SPA SHUT-OFF
- EMERGENCY STOP
- EMERGENCY VENTILATION START
- EMERGENCY VENTILATION STOP

* Custom Legends available, surcharge applies

CONTACT BLOCKS




PILNCCB and PILNOCB

One standard contact block is included with the station, which has a capacity of 1-6 contact blocks (additional block ordered separately). Contact blocks are finger-safe. Robust to withstand harsh environments. Silver alloy (Ag/Ni) contacts, with 10 A cartridge fuse short-circuit protection. Easy, secure mounting system. Screw clamp terminals. Accepts two #12-#24 AWG solid or stranded wires.

Specifications of Contacts

Ambient air temperature	Device Operation	°F(°C)	-13 to +158 (-25 to +70)		
Contact operation	N.O. / N.C.		Slow break		
Continuous current	Maximum thermal	I_{th}	10 A (Cartridge fuse short-circuit protection upstream)		
Rated operational Specifications conforming to IEC/EN 60947-5-1	a.c. Supply: Utilization category AC-15 NEMA A600	V	120	240	600
		A	6	3	1.2
		VA	720	720	720
	d.c. Supply: Utilization category AC-13 NEMA Q600	V	125	250	600
		A	0.55	0.27	0.1



Side and bottom view of Max Duty components Operator, Adaptor, and two Max Duty contact blocks.



Please Note:
 The base Station cannot be field upgraded to the Max Duty model.

FEATURES:

- 20 AMP H.P. Rated
- 1.5 H.P. @120V, 3 H.P. @240V
- Lower installation costs
- Reduced maintenance/downtime
- Increased safety
- 1-2 contact block capacity
- Same UL Type rating as base Wall Plate station
- Same optionally available deep fit cast aluminum alloy Back Box as base Wall Plate station

CONTACT BLOCKS



PILNCCBMDY and PILNOCBMDY

One contact block is included with the station, which has a capacity of 1-2 contact blocks (additional block ordered separately). Available in N.O., N.C configurations. Max Duty contacts are the solution to your higher-current switching needs. Can switch twice as much current as typical “pilot-duty” contacts. They are suitable for starting and stopping small horsepower-rated motors. The net result can be lower installation costs, reduced maintenance/downtime, and increased safety. Screw terminals accept up to 10 AWG wires. Notes: * Max Duty contacts are not recommended for applications below 24V/100 mA.

Specifications of Contacts

Ambient air temperature	Operation	°F(°C)	-13 to +104 (-25 to +40)		
Continuous Current	Maximum thermal	I_{th}	24 A		
Rated operational Specifications	Switch/Pilot Duty - a.c. Supply:		120V AC, 12 A		
		- d.c. Supply:	24V DC, 10 A		
	Start/Stop Motor - a.c. Supply:		120V AC, 1.5 Hp	240V AC, 3 Hp	
		- d.c. Supply:	24V DC, 10 A FLA / 60 A LRA		

PillaSwitch WALL PLATE STATIONS Product Line (shown with various options)



WPSMPSL + PILCLMA
WPS Station w back box + Alarm
(Audible and Visual)



WPS Station w round operator clear
cover (lockable)



WPSKSKR2G 2 Gang WPS Station w
Back box, Key Operators & full cover



WPS Stations w Key Reset and
Illuminated LED 2 position Selector
(Red, Green, Blue)



WPSXBR
EZ Lens Swap Break Glass
WPS Station



WPS WPS Stations w Illuminated LED
Operators (Red, Green, Blue),
and mushroom cover



WPSMPVVR and WPSMPCLMVR
WPS Stations w Voltage Ready
Indicators and clear cover (lockable)



WPSRP1 Indoor WPS Station w round
maintained "Push On-Off" operator &
metal cover(lockable)



WPSMP2GES + PILCLHCOVA
WPS 2 Gang Station, back box +
Alarm (Audible and Visual)

OPERATORS, COVER AND GUARD OPTIONS						
Mushroom Maintained				Turn & Key Reset Maintained		
Mushroom Momentary				Note: LED Illuminated options for many Operators (Red, Green, Blue)		
Round Maintained						
Round Momentary						
Selector & Key Selector Two / Three Position						
Operator Covers & Guards (Padlockable)						

STATION ENCLOSURE DEPTH, COVER & ALARM OPTIONS					
Enclosure Depth & Color Options		Optional deep cast aluminum alloy Back Box and gasket, suitable for wet locations, has 3/4" threaded conduit holes (top, back, and bottom), and plugs – 5 holes for 2 gang and 3 holes for single gang			
	1-3 Control Blocks Capacity				
Full Station Cover		Station EPO Voltage Ready Indicator		Station Alarm (Visual & Audible)	
	"Stay Open" Hinge, Padlockable			Voltages available: 120V, 24V, 12V	

Station Legends (shown w optional Back Box)



WPSMP2GBS + PILBXN4



WPSMP2GBFS



WPSMP2GGS



WPSMP2GHVAC



WPSMP2GPO



WPSMP2GESO



WPSMP2GES



WPSMP2GSL(CS)



WPSMP2GSL(FAN)



WPSMP2GSL(GAS)



WPSMP2GSL(GEN)



WPSMP2GSL(RPG)



WPSMP2GSL(ESD)



WPSMP2GSL(SPA)



WPSMP2GSL(VSTA)



WPSMP2GSL(VS)

* Custom Legends available. Surcharge applies.